artos®

PS118

premier series shower set





FEATURES

Solid Brass 3-Outlets

INCLUDES

F703-13 F703-4 F702-3 F903B-55

OPERATING PRESSURE

Minimum: 15 psi Maximum: 75 psi Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE Maximum: 176°

FLOW CAPACITY Hand Shower: 2.0 USGPM Shower Head::1.8 USGPM Tub Filler: 6.1 USGPM

F901-8 & F902-14 APPROVAL



All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

OPERATING SPECIFICATIONS


artos®

PS118 |

premier series shower set

PRODUCT DIMENSIONS

for trim kit

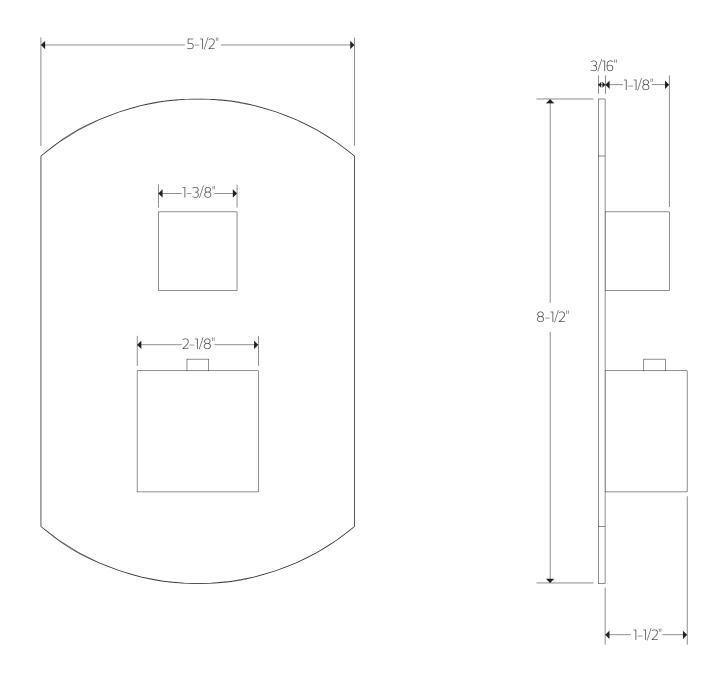



PRODUCT DIMENSIONS

for shower head

artos[®] PS118


premier series shower set

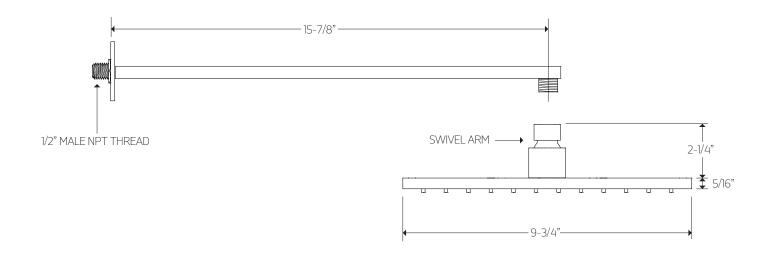



PRODUCT DIMENSIONS

for hand shower

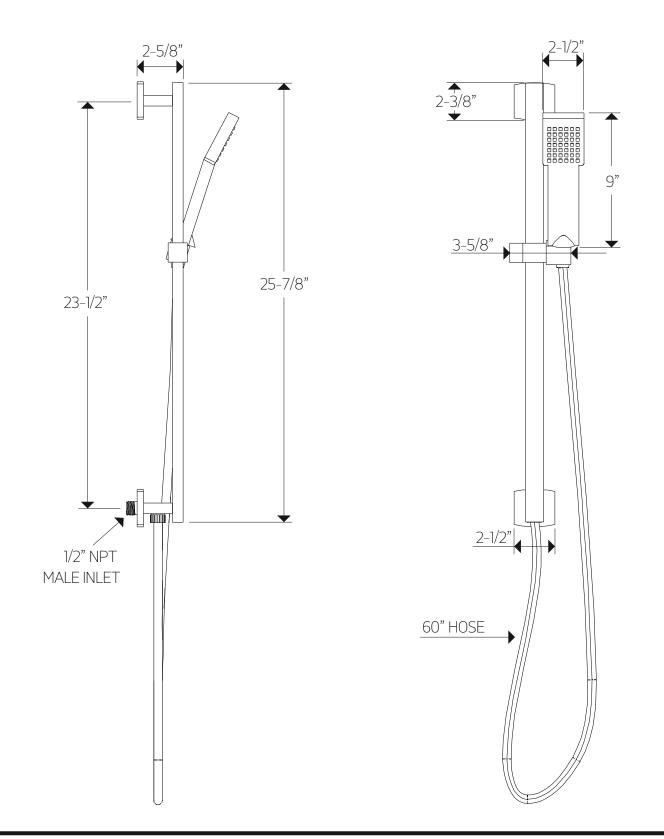

premier series shower set

PS118

artos

artos®

PS118

premier series shower set

PRODUCT DIMENSIONS

for tub filler

