

CHLOE WALL RANGE HOOD



A MODERN TAKE ON COUNTRY CHIC. The Chloe complements traditional and modern kitchen designs alike and is offered in painted black. The Chloe can float on the wall giving it unique shape and charm or for the more traditional look add a chimney kit. With advanced features like LED lighting and auto shut off timer, the Chloe is THE modern designer hood.

Now Available
in 36"



Shown with rear mounting bracket

AVAILABLE MODELS

| Model # | Size / Color | Motor Class | Sound Levels |
|-------------|-------------------|-------------|--------------|
| CHLO28BK600 | 28" Painted Black | 600 CFM | 2.8 - 7.5 |
| CHLO36BK600 | 36" Painted Black | 600 CFM | 2.8 - 7.5 |

KEY FEATURES



LED Light Bar

Low consumption 3 watt/4000K LED bar with a dimmer to light up your cooking area using very little energy.

Perimeter Aspiration

Air is forced through narrow slots around the perimeter of the center panel greatly improving contaminant extraction.



Remote Control (optional)

Control all features of the hood from the convenience of a wireless ADA compliant remote control. (sold separately)



Rear Mounting Bracket


Extends Chloe off the wall and allows for rear venting.

SPECIFICATIONS

| | |
|---|--|
| convertible to ductless / recirculating | yes - with FILTER1 or FILTER1LL2 |
| canopy depth / height | 13 3/4" d / 12 5/8" h |
| chimney kit accessory | yes - min 14 15/16" Max 25 9/16" |
| controls | 4 speed push button with LED indicator |
| rear mounting bracket | yes |
| lighting | LED light bar |
| ducting top / rear (Vari-Duct) | yes - 6" round |
| perimeter aspiration | yes |
| grease filters | dishwasher safe mesh |
| 10 minute intensive speed | yes |
| 30 minute delay | yes |
| 15 minute auto shut off | yes |
| ADA compliant | yes (with remote control purchase) |
| AC input / AC Power | 320 watts / 2.7 amps |

DIMENSIONS

OVERALL DIMENSIONS

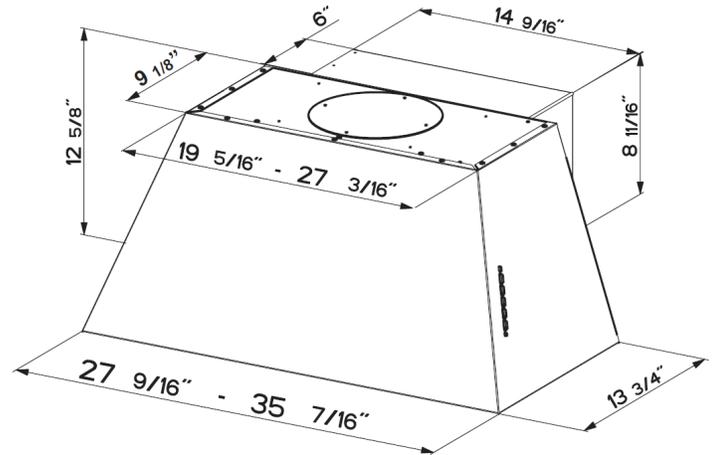

PERFORMANCE

| | SPEED | 1 | 2 | 3 | BOOST |
|-------|-------|-----|-----|-----|-------|
| CFM | | 150 | 300 | 450 | 560 |
| sones | | 2.8 | 4.3 | 6.0 | 7.5 |

MIN/MAX CHIMNEY HEIGHTS

| | NO CHIMNEY | WITH CHIMNEY |
|---------------|------------|--------------|
| Min @ 24" OFF | 6' 5/8" | 7' 2 7/8" |
| Max @ 30" OFF | 6' 6 5/8" | 8' 8 3/16" |

IMPORTANT! : Min/Max heights are for planning purposes only, see install instructions

ACCESSORIES

FILTER1 - Charcoal Filter Kit

High quality charcoal filter for use when recirculating the air back into the kitchen. Filters out odor and should be replaced every 6 months.

FILTER1LL2 - Long Lasting Charcoal Filter Kit

New washable charcoal filter can be recharged and washed up to 8 times. For use when recirculating the air back into the kitchen. Filters out odor and can last up to 4 years.

CHIMCHBK- Chimney Kit

black upper and lower chimney covers.

REMORIG- Remote Control

Control all features of the hood from the convenience of a wireless remote control.

CFMRED - CFM Reducer Kit *

For use in make up air areas where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300.


CFMRED2 CFM Reducer Kit *

For use in make up air environments where an under 400 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm from 600 to under 400.

MUDAMPER6 / MUDAMPER8 - Universal Make-Up Air Damper

Satisfies make-up air requirements, this kit uses an air switch to activate the make-up air damper to open and bring fresh air into the home when the hood fan is on. It then closes tightly when the hood is off. The CFM level is not reduced with this accessory.

SIDEVIEW DIMENSIONS WITH WALL BRACKET

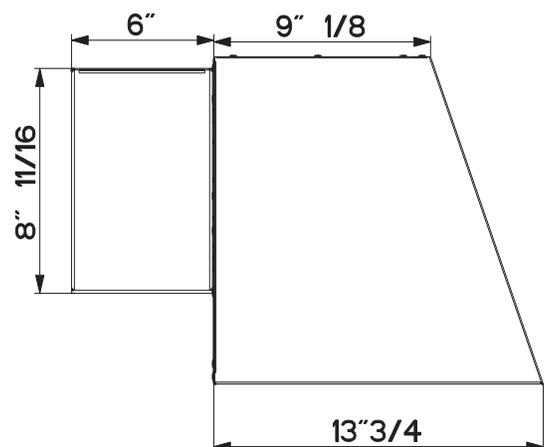

WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this range hood. * Check local make up air codes for guidelines.

