

Specifications

DESCRIPTION

- Brass spout and metal handle construction with Chrome finish
- 3/8" compression stainless steel supply lines
- No lift rod hole in models without drain
- Vandal resistant aerator and handle assembly
- Red and Blue plastic indicator inserts

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel

FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
 - 1.2 gpm max (4.5L/min) at 60 psi

CARTRIDGE


- 1255 Duralast™ cartridge with brass adjustable temperature limit stop
- Nonmetallic/nonferrous and ceramic material

STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handle

WARRANTY


- Warranted for 5 years against material or manufacturing defects



M•Dura™
Single-Handle Lavatory Faucet

Model	Flow (gpm)	Drain	WaterSense®
9417F12	1.2	Without	X
9419F12	1.2	All Metal	X

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.

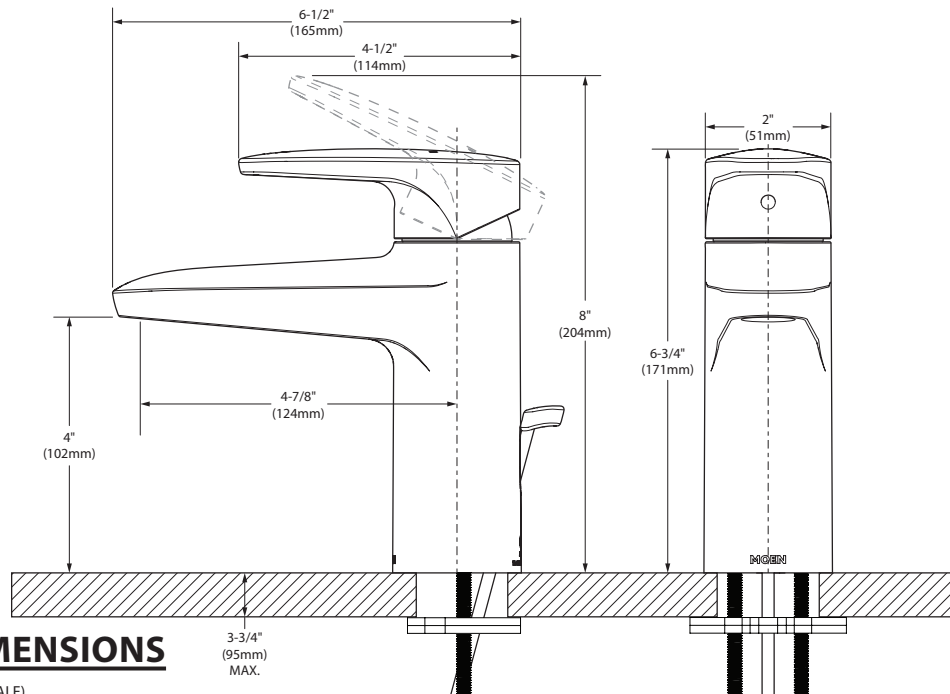

CRITICAL DIMENSIONS

(DO NOT SCALE)