HPIN42WS 42-INCH BOX ISLAND HOOD PROFESSIONAL® SERIES







FEATURES & BENEFITS

- Meticulously sculpted, floating stainless steel Professional® Series island hoods make a dramatic statement in your kitchen
- Crafted to complete the ultimate cooking system with Thermador ranges
- ★ Equipped with the Thermador Connected Experience by Home Connect[™]
 - Powerfully $\ensuremath{\mathsf{Quiet}}\xspace^{\ensuremath{\mathsf{B}}\xspace}$ system accepts integral, inline, and remote blowers
 - Beautiful illumination with multi-level, vivid LED lights

ACCESSORIES (OPTIONAL)


25 ft. Blower Connector Cable - EXTNCB25W

For use with the following inline and remote blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

Roofplates

RFPLT600P - For use with 600 CFM remote blower VTR630W

RFPLT1000P - For use with 1000 CFM remote blower VTR1030W and 1300 CFM blower VTR1330W



GENERAL PROPERTIES

Features

Multi-Level LED Lights with Fading Transitions, Automatic Mode, Check Filter Reminder Light, Delay Shut-Off


Operating Mode	Ducted			
Maximum CFM	Blower Sold Separately			
Number of Speed Settings	4-Stage			
Number of Lights	4			
Bulb Type	LED			
Total Power of the Lamps (W)	4.8 W			
Damper Included	Yes			
Grease Filter Material	Washable Stainless Steel			
Grease Filter Type	Stainless-Steel Commercial Style Baffle Filter			
Home Connect™ (Wi-Fi Enabled)	Yes			
TECHNICAL DETAILS				
Watts (W)	See Chart on Page 3			
Current (A)	See Chart on Page 3			
Volts (V)	120 V			
Frequency (Hz)	60 Hz			
Plug Туре	Fixed Connection			
Power Cord / Conduit Length (in)	Direct Wire at Junction Box			
DIMENSIONS & WEIGHT				
DIMENSIONS & WEIGHT Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in)	5 1/4" x 41 15/16" x 26 11/16"			
Overall Appliance Dimensions				
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in)	26 11/16"			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in)	26 11/16" 24 3/4" - 36 3/4"			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas /	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min.			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max.			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10"			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs)	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10"			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED)	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10"			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED) Blower (Sold Separately) BLOWER OPTIONS Remote Blowers	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10"			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED) Blower (Sold Separately) BLOWER OPTIONS	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10" 126 lbs			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED) Blower (Sold Separately) BLOWER OPTIONS Remote Blowers	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10" 126 lbs			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED) Blower (Sold Separately) BLOWER OPTIONS Remote Blowers (Mounted to Roof or External Wall) Inline Blowers	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10" 126 lbs VTR630W - 600 CFM VTR1030W - 1000 CFM			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED) Blower (Sold Separately) BLOWER OPTIONS Remote Blowers (Mounted to Roof or External Wall)	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10" 126 lbs VTR630W - 600 CFM VTR1030W - 1000 CFM VTR1330W - 1300 CFM			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED) Blower (Sold Separately) BLOWER OPTIONS Remote Blowers (Mounted to Roof or External Wall) Inline Blowers	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10" 126 lbs VTR630W - 600 CFM VTR1030W - 1000 CFM VTR1330W - 1300 CFM VTI610W - 600 CFM			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED) Blower (Sold Separately) BLOWER OPTIONS Remote Blowers (Mounted to Roof or External Wall) Inline Blowers (Mounted Between Kitchen and External Wall)	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10" 126 lbs VTR630W - 600 CFM VTR1030W - 1000 CFM VTR1330W - 1300 CFM VTI610W - 600 CFM VTI1010W - 1000 CFM			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED) Blower (Sold Separately) BLOWER OPTIONS Remote Blowers (Mounted to Roof or External Wall) Inline Blowers (Mounted Between Kitchen and External Wall)	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10" 126 lbs VTR630W - 600 CFM VTR1030W - 1000 CFM VTR1330W - 1300 CFM VTI610W - 600 CFM VTI610W - 600 CFM VTI630W - 600 CFM			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in) Height of the Chimney (in) Minimum Ceiling Height Required Minimum Required Distance Above Gas / Electric Cooking Surface Diameter of Air Duct (in) Top Net Weight (lbs) ACCESSORIES (REQUIRED) Blower (Sold Separately) BLOWER OPTIONS Remote Blowers (Mounted to Roof or External Wall) Inline Blowers (Mounted Between Kitchen and External Wall) Integrated Blower (Mounted in Hood)	26 11/16" 24 3/4" - 36 3/4" 8' 30" / 30" min. 40" / 40" max. 10" 126 lbs VTR630W - 600 CFM VTR1030W - 1000 CFM VTR1330W - 1300 CFM VTI610W - 600 CFM VTI610W - 600 CFM VTI630W - 600 CFM			

HPIN42WS 42-INCH BOX ISLAND HOOD

PROFESSIONAL® SERIES



HOOD DIMENSIONS

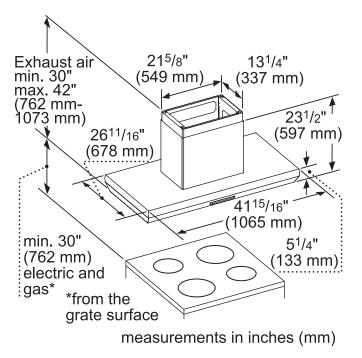


HPIN42WS 42-INCH BOX ISLAND HOOD PROFESSIONAL® SERIES



			ELECTRIC LOAD						
MODEL	DESCRIPTION		VTN630W	VTN1090R	VTI610W	VTI1010W	VTR630W	VTR1030W	VTR1330W
HPIN42WS	42" Pro Island Hood	Amps	4.6	8.0	6.5	8.4	6.5	8.4	11.9
		Watts	552	960	780	1,008	780	1,008	1,428


REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)

VTR630W-600 CFM




measurements in inches and mm

VTR1030W-1000 CFM



measurements in inches and mm

VTR1330W-1300 CFM




measurements in inches and mm

HPIN42WS 42-INCH BOX ISLAND HOOD PROFESSIONAL® SERIES




INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

VTI610W-600 CFM



measurements in inches and mm


VTI1010W-1000 CFM



measurements in inches and mm


INTEGRATED BLOWERS (MOUNTED IN HOOD)

VTN630W-600 CFM



measurements in inches (mm)

VTN1090R-1000 CFM



measurements in inches and mm

HPIN42WS 42-INCH BOX ISLAND HOOD

PROFESSIONAL® SERIES



REMOTE BLOWER ACCESSORIES


ROOFPLATE-RFPLT600P

81/8"

(206 mm)

1

0

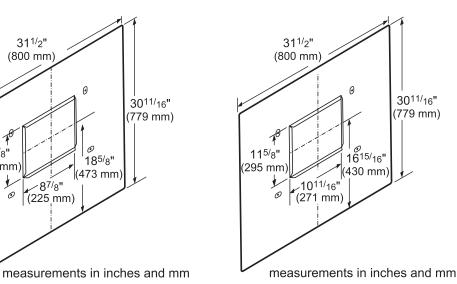

ROOFPLATE-RFPLT1000P

EXTNCB25W

For use with the following Inline and Remote Blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.