



FEATURES & BENEFITS

- Pro Harmony® wall hoods add bold, distinct flair to your kitchen and are crafted to complete the ultimate cooking system
- 24" in depth, a perfect companion to Pro Harmony® Ranges and Rangetops
- Powerfully $\ensuremath{\mathsf{Quiet}}\xspace^{\ensuremath{\mathsf{\$}}\xspace}$ system accepts integral, inline, and remote blowers
- Dishwasher-safe stainless steel, commercial-style baffle filters
- Beautiful illumination with multi-level, vivid LED lights

ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25W

EXTNCB25W - For use with the following inline and remote blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

Roofplates

RFPLT600P - For use with 600 CFM remote blower VTR630W

RFPLT1000P - For use with 1000 CFM remote blower VTR1030W and 1300 CFM blower VTR1330W

6" Tall Duct Cover, 48" Wide	DC486W		
8' - 9' Ceiling Telescoping Duct Cover, 48" Wide	DC4889W		
10' - 12' Ceiling Telescoping Duct Cover, 48" Wide	DC481012W		

Built-In Remote Control Panel

REMCPW - Ability to vertically install on cabinetry or wall to control hood in a convenient location

GENERAL PROPERTIES


Features

Multi-Level LED Lights with Fading Transitions, Automatic Mode, Check Filter Reminder Light, Delay Shut-Off

Operating Mode	Ducted			
Number of Speed Settings	4-Stage			
Motor Location	Blower (Sold Separately)			
Number Of Lights	4			
Bulb Type	LED			
Light Lumens	100 – 150			
Light Color (°K)	3500 – 4000			
Total Power Of The Lamps (W)	4.8			
Damper Included	Yes			
Grease Filter Material	Washable Stainless Steel			
Grease Filter Type	Stainless-Steel Commercial Style Baffle Filter			
Home Connect™ (Wi-Fi Enabled)	No			
TECHNICAL DETAILS				
Watts (W)	See Chart on Page 3			
Current (A)	See Chart on Page 3			
Volts (V)	120 V			
Frequency (Hz)	60 HZ			
Plug Туре	120V-3 Prong			
DIMENSIONS & WEIGHT				
Overall Appliance Dimensions (Width Of Canopy Included) (HxWxD) (in)	18" × 47 15/₁₆ " × 24"			
Minimum Required Distance Above Gas / Electric Cooking Surface	30" / 30"			
Diameter of Air Duct (in) Top	10"			
Diameter of Air Duct (in) Back	10"			
Net Weight (lbs)	94 lbs			
ACCESSORIES (REQUIRED)				
Blower (Sold Separately)				
BLOWER OPTIONS				
Remote Blower				
	VTR630W - 600 CFM			
(Mounted to Roof or External Wall)	VTR630W - 600 CFM VTR1030W - 1000 CFM			
(Mounted to Roof or External Wall)	VTR1030W - 1000 CFM			
(Mounted to Roof or External Wall)	VTR1030W - 1000 CFM VTR1330W - 1300 CFM			
(Mounted to Roof or External Wall)	VTR1030W - 1000 CFM VTR1330W - 1300 CFM VTI610W - 600 CFM			
(Mounted to Roof or External Wall) Inline Blower (Mounted Between Kitchen and External Wall)	VTR1030W - 1000 CFM VTR1330W - 1300 CFM VTI610W - 600 CFM VTI1010W - 1000 CFM			
(Mounted to Roof or External Wall) Inline Blower (Mounted Between Kitchen and External Wall)	VTR1030W - 1000 CFM VTR1330W - 1300 CFM VTI610W - 600 CFM VTI1010W - 1000 CFM VTN630W - 600 CFM			
(Mounted to Roof or External Wall) Inline Blower (Mounted Between Kitchen and External Wall) Integrated Blower (Mounted in Hood)	VTR1030W - 1000 CFM VTR1330W - 1300 CFM VTI610W - 600 CFM VTI1010W - 1000 CFM VTN630W - 600 CFM			




HOOD DIMENSIONS

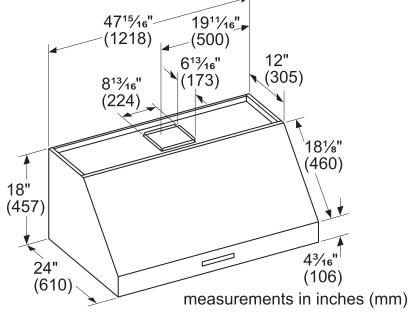

OPTIONAL ACCESSORIES

48" WIDE DUCT COVER


Stainless steel duct cover for wall hood applications



DC4889W TELESCOPING FOR 8'-9' CEILINGS




measurements in inches (mm)



DC481012W TELESCOPING FOR 10'-12' CEILINGS



measurements in inches (mm)



REMOTE CONTROL PANEL REMCPW




Convenience at your fingertips: The remote control accessory offers the freedom to extend your hood controls to a more reachable spot



			ELECTRIC LOAD						
MODEL	DESCRIPTION		VTN630W	VTN1090R	VTI610W	VTI1010W	VTR630W	VTR1030W	VTR1330W
PH48HWS	48" Harmony Wall Hood	Amps	4.6	8.0	6.5	8.4	6.5	8.4	11.9
		Watts	552	960	780	1,008	780	1,008	1,428


REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)

VTR630W-600 CFM




measurements in inches and mm

VTR1030W-1000 CFM



measurements in inches and mm

VTR1330W-1300 CFM




measurements in inches and mm




INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

VTI610W-600 CFM



measurements in inches and mm


VTI1010W-1000 CFM



measurements in inches and mm


INTEGRATED BLOWERS (MOUNTED IN HOOD)

VTN630W-600 CFM



measurements in inches (mm)

VTN1090R-1000 CFM




measurements in inches and mm



REMOTE BLOWER ACCESSORIES

ROOFPLATE-RFPLT600P

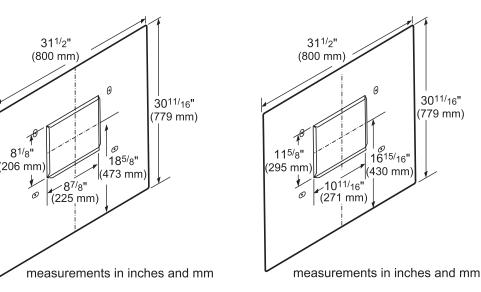

ROOFPLATE-RFPLT1000P

EXTNCB25W

For use with the following Inline and Remote Blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.