

# 15" STAINLESS SOLID DOOR BEVERAGE DISPENSER

## TUR-15BD-R/L-SS-C

TUR-15BD-R-SS-C (Right hinged)

TUR-15BD-L-SS-C (Left hinged)

### FEATURES

- Environmentally friendly R600a refrigerant.
- Industry exclusive, 300-series stainless steel interior and exterior.
- Zero-clearance hinging allows for integrated installation.
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options.
- True Precision Control® with steel touch technology and readout provides digital accuracy.
- Balanced, forced-air refrigeration system enables rapid product pull down and even temperature throughout.
- TrueFlex® shelving system allows for adjustable organization options.
- Sabbath mode compliant.
- Lock standard on stainless steel models (SS, SG).
- All undercounter models UL rated for outdoor use.
- Exclusive airflow technology provides the perfect serve every time.
- Standard with draft tower, CO<sub>2</sub> tank, CO<sub>2</sub> regulator valve, and low profile Sankey tapper.
- Unit accommodates (1) slim ¼ barrel or (1) ½ barrel.



### BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at [true-residential.com/custom](http://true-residential.com/custom).




TUR-15BD-R-SS-C

### SPECIFICATIONS

Dimensions (w x h x d)	14 7/8" x 34 1/4" x 23 7/8"
Cutout Dimensions (w x h x d)	15" x 34 1/2" x 24"
Capacity (cu. ft.)	3.1  x82
Temperature Range	33°F - 47°F
Weight (lbs.)	150
Voltage	115/60/1  115/60/1 NEMA-5-15R
Amps	1.9
Annual Energy Consumption (kwh)	288
Power Cord Length (ft.)	8
Energy Star Rated	—

15" STAINLESS SOLID DOOR BEVERAGE DISPENSER

TUR-15BD-R/L-SS-C

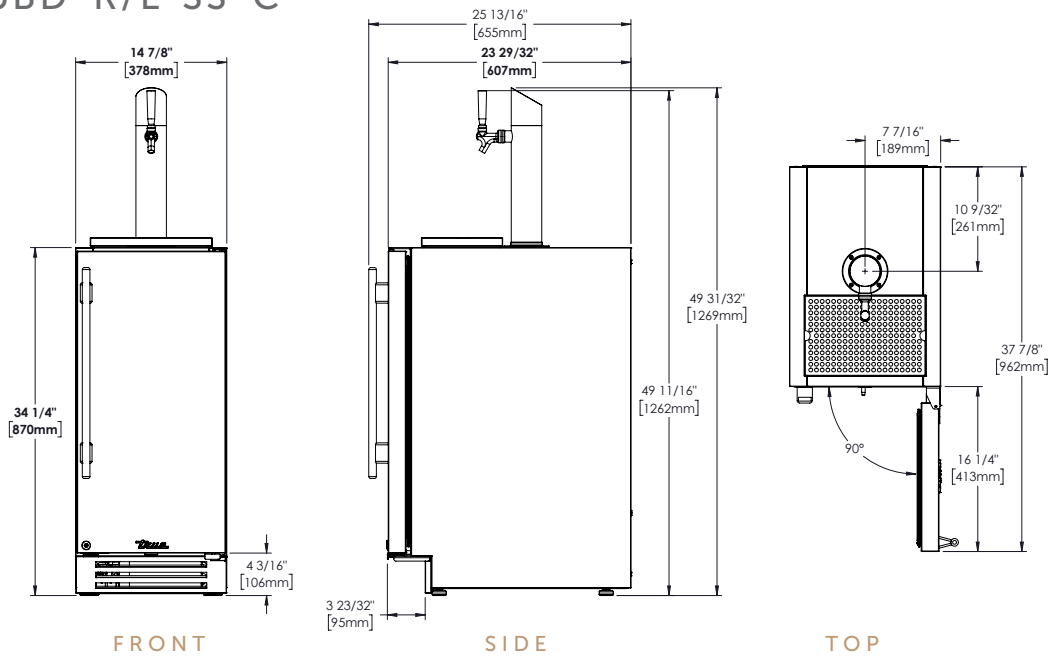

OPENING DIMENSIONS



MODEL OPTIONS

MODEL	FINISH
TUR-15BD-R-SS-C	Stainless solid door right-hinged
TUR-15BD-L-SS-C	Stainless solid door left-hinged

ACCESSORIES (OPTIONAL)

- Anti-condensation pads
- Nitro coffee kit – single tap
- Beer line cleaning kit

WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7–12 year (parts only – sealed system on registered products)