


# MONARCH WPD38I SERIES RANGE HOOD

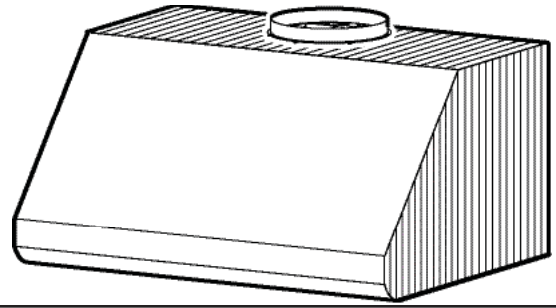

Especially designed to be installed outdoors in a covered patio or lanai area. For use over residential commercial-style cooking surfaces or gas and electric grills. This unit is not for use with a charcoal grill. A complete installation requires several optional components. Refer to page 2 when planning your installation.

### FEATURES

- Professional outdoor design.
- 27-inch depth handles heat and size of outdoor grills (optional 3" wall extension to increase depth to 30").
- Brushed corrosion resistant 304 Stainless Steel.
- Four widths: 36, 42, 48, and 60 inches.
- Powerful, SuperPro 1200™ internal blower - tested to assure operation in corrosive environments.
- Bright halogen lighting (2 x 50 watts GU10 for 36-in. & 42-in. hoods, 3 x 50 watts GU10 for 48-in. & 60-in. hoods) (bulbs included).
- 4-speed rotary control - tested to assure operation in corrosive environments.
- 304 Stainless Steel baffle filters - easily accessible and dishwasher-safe.
- Removable grease rail - easy to clean.
- Heat Sentry™ detects excessive heat and adjusts blower speed automatically.
- UL and cUL listed for use in damp locations when properly connected to a GFCI circuit.



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

### WALL EXTENSION (optional)

- Extends front of hood out an extra 3" (to 30") - eliminates custom wall bump-outs.
- Stainless Steel construction - matches range hood.
- Attaches to wall and back of range hood.

Model AWWPD336SB - 36-in. width  
 Model AWWPD342SB - 42-in. width  
 Model AWWPD348SB - 48-in. width  
 Model AWWPD360SB - 60-in. width

### FLUE COVER (optional)


- Stainless Steel construction - matches range hood.
- Attaches to top of range hood shell.
- Hides ducting and wipes clean easily.
- Extended depth available for hoods using the 3" wall extension.

Model AEWPD36SB - 6-in. high - for 8-ft. ceiling - standard depth  
 Model AEWPD36SBE - 6-in. high - for 8-ft. ceiling - extended depth  
 Model AEWPD318SB - 18-in. high - for 9-ft. ceiling - standard depth  
 Model AEWPD318SBE - 18-in. high - for 9-ft. ceiling - extended depth  
 Model AEWPD330SB - 30-in. high - for 10-ft. ceiling - standard depth  
 Model AEWPD330SBE - 30-in. high - for 10-ft. ceiling - extended depth  
 Model AEWPD3054SB - collapsed height: 30" - maximum height 54" - standard depth  
 Model AEWPD3054SBE - collapsed height: 30" - maximum height 54" - extended depth

### SPECIFICATIONS

VOLTS	HZ	AMPS	CFM	SONES	DUCT
120	60	9.0 MAX.	1160	11.0	10-in. ROUND











### AIR FLOW PERFORMANCE

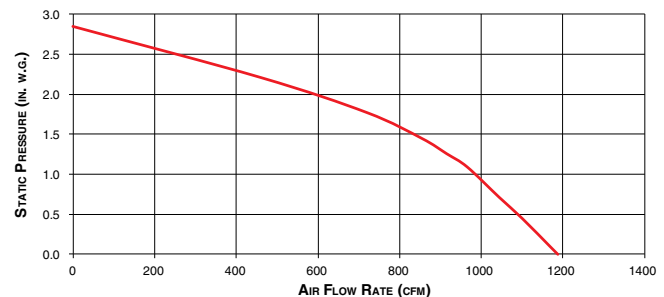

BEST Hartford, Wisconsin [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 800-558-1711  
 BEST Drummondville, QC, Canada [www.BestRangeHoods.ca](http://www.BestRangeHoods.ca) 866-737-7770

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date

# - WPD38I SERIES RANGE HOOD SYSTEM -

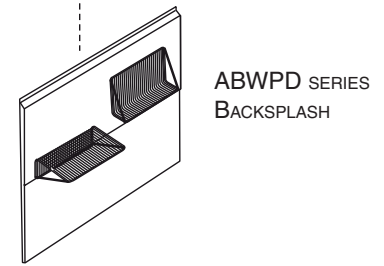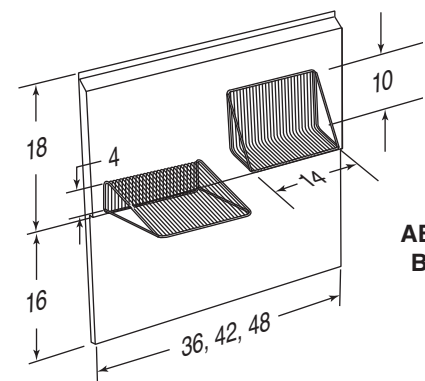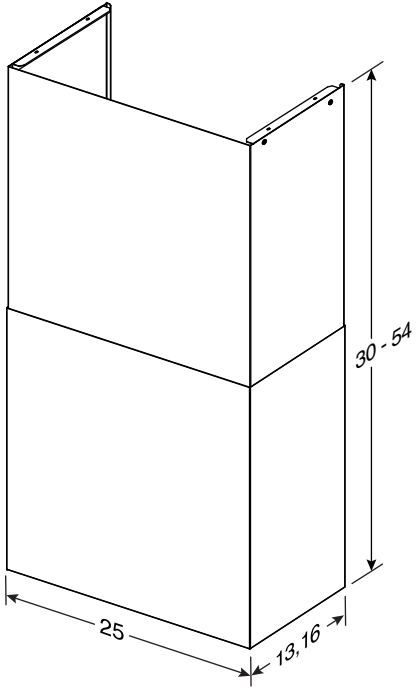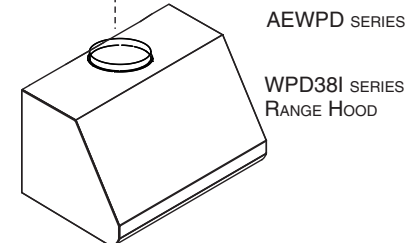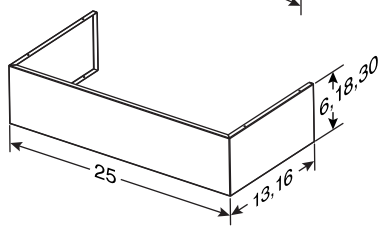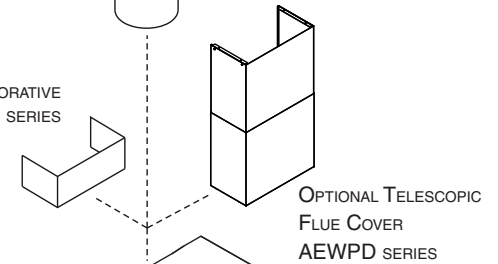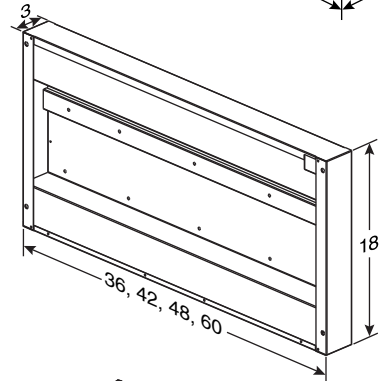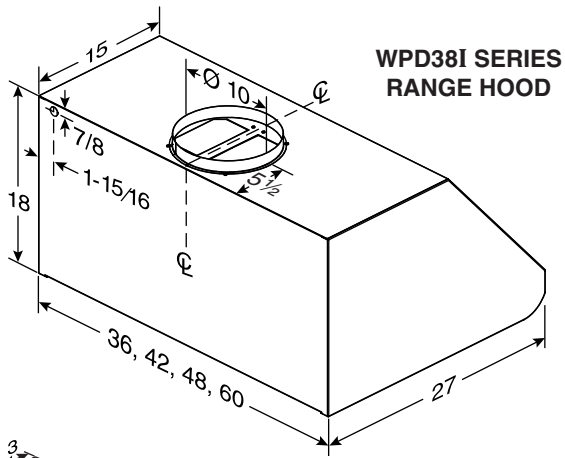

NOTE: DIMENSIONS SHOWN ARE IN INCHES