SCIROCCO LUX DOWN DRAFT RANGE HOOD



15" TALL RISING DOWN DRAFT WITH GLASS AND LED LIGHTING. THE SCIROCCO LUX GLASS DOWN DRAFT IS PERFECT FOR INSTALLATIONS WHERE A CANOPY WOULD BE OBSTRUCTIVE. OR WALL INSTALLATIONS WHERE CABINET SPACE IS AT A PREMIUM. WITH A REVERSIBLE MOTOR BOX, THE HOOD CAN FIT BEHIND A RANGE TOP, COOKTOP OR COOKTOP/OVEN COMBO.



AVAILABLE MODELS

model #	size / color	cfm*
SCLX3015BKNB-B	30 Black Glass/SS	choose
SCLX3615BKNB-B	36 Black Glass/SS	choose
SCLX3015SSNB-B	30 Gray Glass/SS	choose
SCLX3615SSNB-B	36 Gray Glass/SS	choose

* choose a blower	cfm		
IBDD600-B	600		
RB900	900		
RB1200	1200		
AXP250	735		

KEY FEATURES



LED Digital Touch Controls

Electronic controls with a LED indicator to show the current speed and two level lighting, 24 hour anti-pollution mode and filter wash indicator

LED bulbs

Low consumption 1 watt LED bulbs with a dimmer light up your cooking but use very little energy



Pro Motor

The motor in this hood is surrounded in metal with all metal impellers for top performance



Perimetric Filter System Perimetric filter increases efficiency and decreases noise levels

SCIROCCO LUX

DOWN DRAFT RANGE HOOD



SPECIFICATIONS

DIMENSIONS

max rise height	16"		
convertible to ductless / recirculating	yes - with DUCTSCIR		
multiple ducting options	internal: left, right, down, forward, back remote - forward or back		
reversible motor box	yes		
hood width depth (36")	30"- 36" w 4" d		
controls	digital soft touch control		
lighting	LED light bar		
ducting front/back	6" round (internal) or 10" round (remote)		
grease filters	dishwasher safe mesh		
Perimetric Filter/ SilentKit	yes		
24 hour anti-pollution mode	yes		
Pro Motor (metal impellers)	yes		
10 minute intensive speed	yes		

PERFORMANCE

SPEED	1	2	3	4	BOOST
CFM	150	350	450	500	560
Sones	1.5	2.5	3.5	4.5	6.5

ACCESSORIES

FILTERSCIR-**Replacement Charcoal Filter Kit**

High quality charcoal filter for use when recirculating the air back into the kitchen. Filters out odor and should be replaced every 6 months. # DUCTSCIR

Ductless Conversion Kit Converts the Scirocco Lux to ductless. The kit includes charcoal filters and a kick plate return register to vent

WIREBOXSCLX

Fixed Wiring Box

FLANGE10

A 10" plate for connecting the remote blower to 10" round ducting. This is required for AXP250 & non-Faber


MUDAMPER6 / MUDAMPER8/ **MUDAMER10 -**

Universal Make-Up Air Damper


Satisfies make-up air requirements. this kit uses an air switch to activate the make-up air damper to open and bring fresh air into the home when the hood fan is on. It then closes tightly when the hood is off. The CFM level is not reduced with this accessory. NOTE: MUDAMPER10 for use with 900/1200 cfm motors.

FLANGE3 3 1/4" x 10" Rectangular Flange Transition

For ceiling or downdraft hoods with an external blower that requires a 10" round duct, this transition turns the duct into a 3 1/4" x 10" rectangular duct. Transition back to 10" round once inside the basement, ceiling, attic, wall etc.

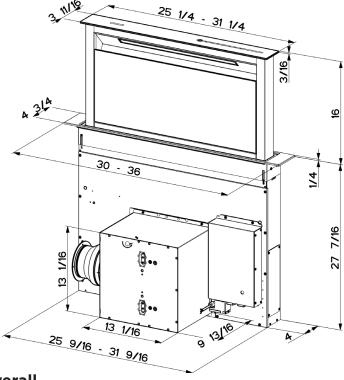

Overall

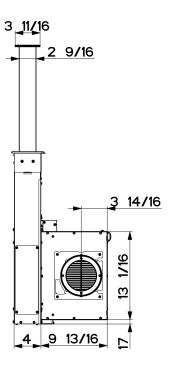

Side

WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this range hood. * Check local make up air codes for guidelines.



back into the kitchen.

Required to wire a remote blower to the Scirocco Lux.

10" Plate for Remote **Blower**

remote blowers.













